ANPz102/RES/HL/LT - linear z-nanopositioner

1028563

Technical Specifications

Size and Dimensions	
footprint; height	24 mm x 24 mm; 27 mm
maximum installation space	24 mm x 24 mm; 32 mm
weight	55 g
height	27 mm
cable	30 cm cable with connector
Materials	
positioner body	titanium
actuator	PZT ceramics
connecting wires	insulated twisted pair, copper
Coarse Positioning Mode	
travel range (step mode)	4.8 mm
maximum drive velocity @ 300 K	~ 3 mm/s
input voltage range	0 - 60 V
Fine Positioning Mode	
fine linear positioning range @ 300 K	3.5 µm
fine linear positioning range @ 4 K	0.5 µm
fine positioning resolution	sub-nm
input DC voltage range @ 300 K	0 - 100 V
input DC voltage range @ 4 K	0 - 150 V
Position Encoder	
readout mechanism	resistive sensor
encoded travel range	full travel
sensor resolution	~ 200 nm
sensor power (when measuring)	0.01 - 1 mW
repeatability	1..2 µm (unidirectional)
Load (@ ambient conditions)	
maximum load	300 g
maximum dynamic force along the axis	3 N
General Specifications	
environment	/LT

All rights, including rights created by patent grant or registration of a utility model or design as well as rights of technical modifications are reserved. Delivery subject to availability. Designations may be trademarks, the use of which by third parties for their own purposes may violate the rights of the trademark owners. © attocube systems GmbH

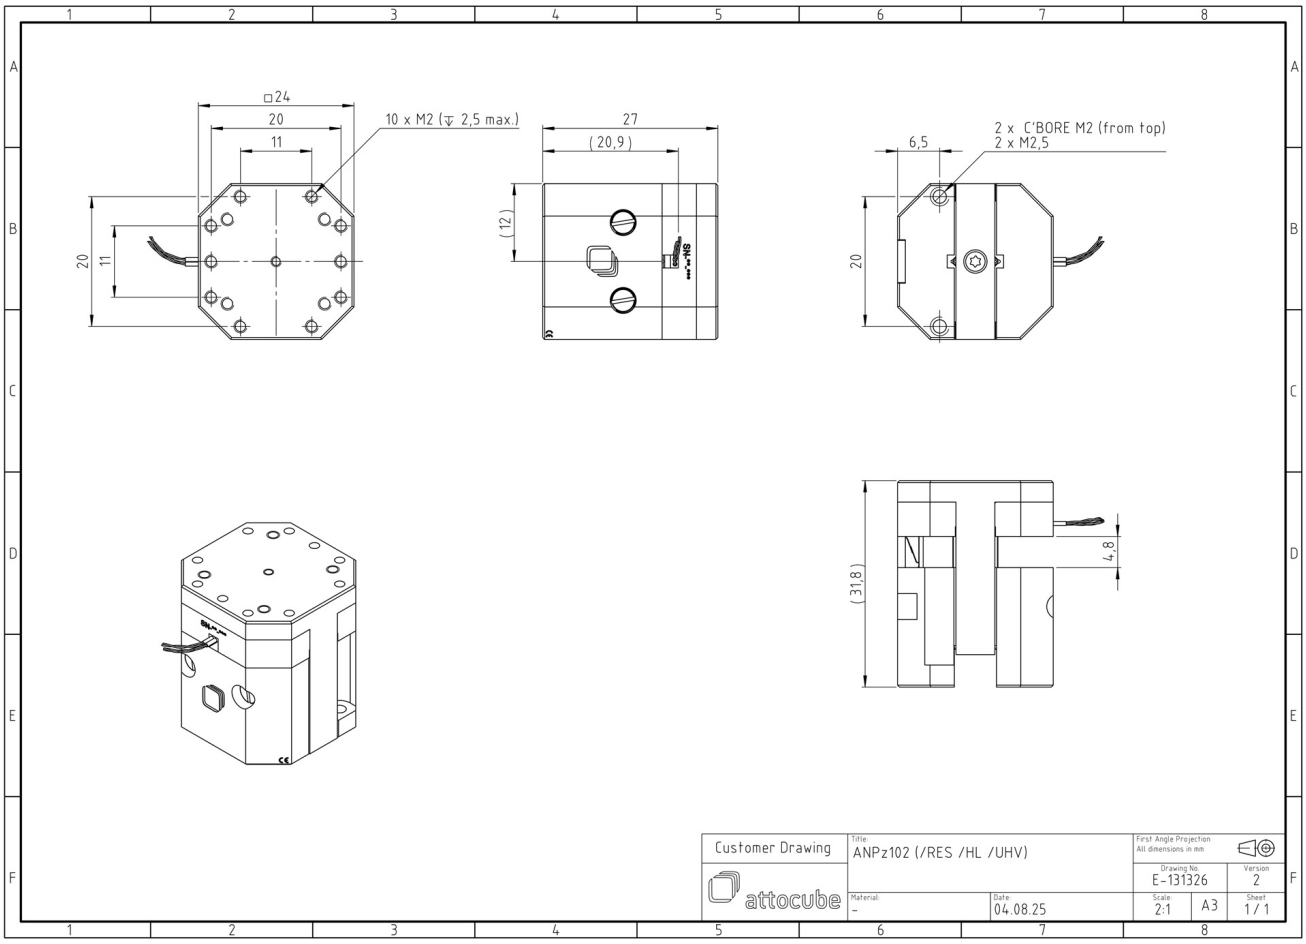

All rights, including rights created by patent grant or registration of a utility model or design as well as rights of technical modifications are reserved. Delivery subject to availability. Designations may be trademarks, the use of which by third parties for their own purposes may violate the rights of the trademark owners. © attocube systems GmbH