ECGp5050/AI/HL/RT

1008842

Technical Specifications

Size and Dimensions	
footprint; height	50 mm x 50 mm; 17 mm
distance center of rotation to bottom	94 mm
maximum installation space	50 mm x 69.8 mm; 19.5 mm
weight (aluminium version)	137 g
height	17 mm
cable	50 cm cable with connector
Materials	
positioner body	aluminum
actuator	PZT ceramics
connecting wires	copper, jacket: RT: PTFE, HV/UHV: fiberglass
Coarse Positioning Mode	
travel range (step mode)	10 °
maximum drive velocity @ 300 K	3 °/s
input voltage range	0 - 45 V
Fine Positioning Mode	
fine angular positioning range @ 300 K	1.1 m°
fine positioning resolution	µ°
input DC voltage range	0 - 45 V
Load (@ ambient conditions)	
maximum load	1 kg
maximum dynamic torque around axis	43.5 Ncm
General Specifications	
environment	/RT
operating temperature range	17 - 25 °C
operating humidity range	40 - 60%

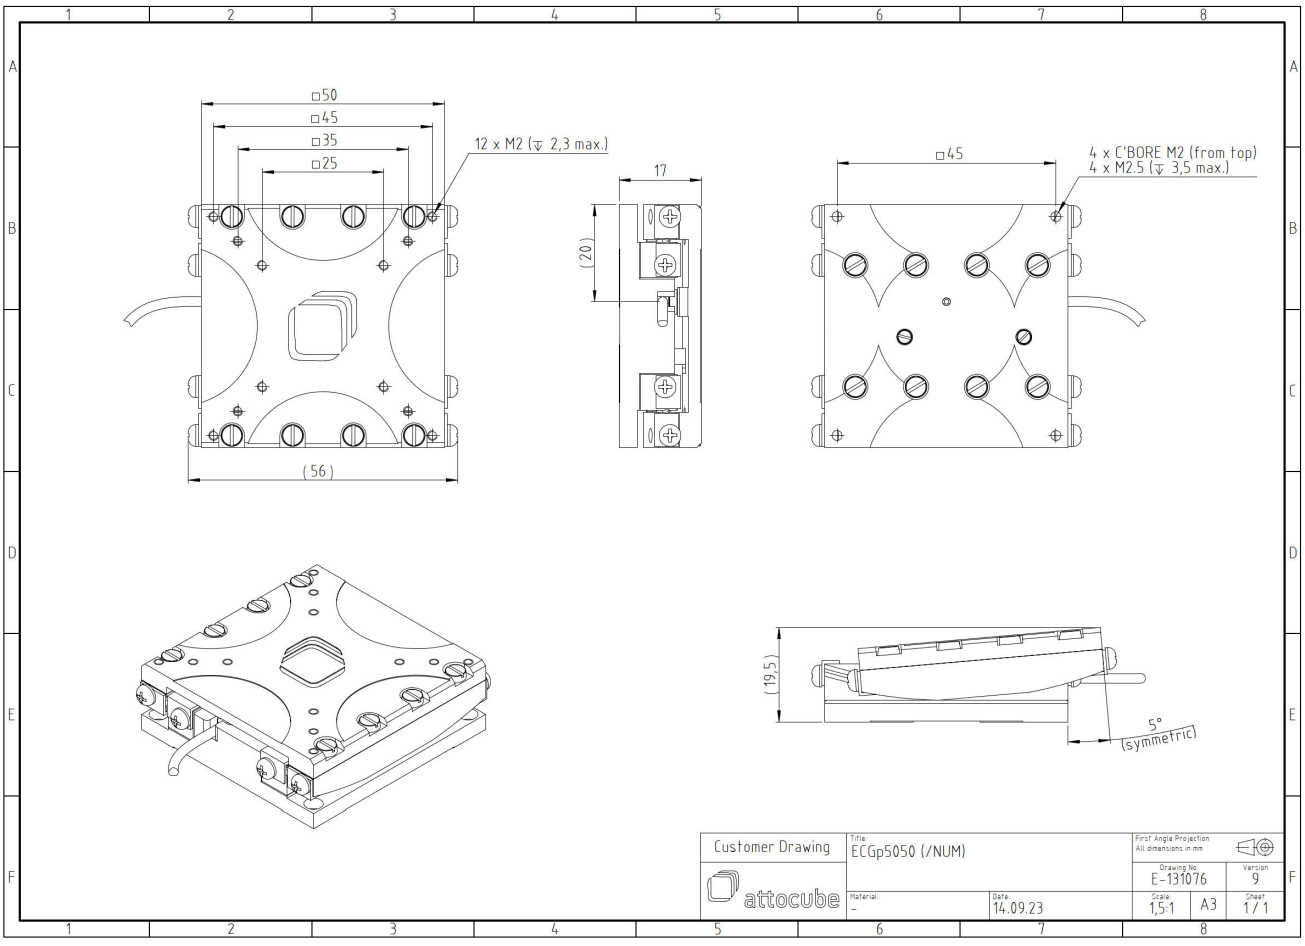

All rights, including rights created by patent grant or registration of a utility model or design as well as rights of technical modifications are reserved. Delivery subject to availability. Designations may be trademarks, the use of which by third parties for their own purposes may violate the rights of the trademark owners. © attocube systems GmbH